

innovair®


innovative ideas in air conditioning

21

SEER EFFICIENCY

VEXUS

SPLIT AIR CONDITIONER
AIRE ACONDICIONADO TIPO SPLIT

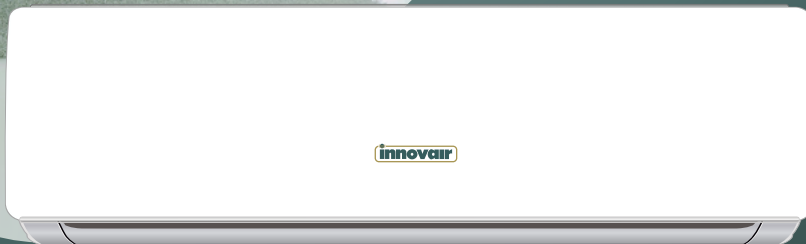

3D Air Flow
Flujo de Aire 3D



Wi-Fi Ready
Wi-Fi Listo



High Ambient Cooling
Alto Enfriamiento de Ambiente



Quiet Operation
Operación Silenciosa



Sleep Mode
Modo de Reposo



Quick-Cool down
Rápido Enfriamiento



Voltage Protection
Protección de Voltaje



High Efficiency
Alta Eficiencia



Dehumidifier
Deshumidificador



Easy Access Maintenance
Fácil Acceso de Mantenimiento



Coated PC Board



Low Voltage Starter



High Voltage Safety



Turbo Cooling



Quiet Operation



Gold-Fin Protection

www.innovair.com



ISO 14001 ISO 9001

INVERTER™

MODEL			VIN414C1V33	VIN414C2V33	VIN520C2V33	VIN625C2V33	VIN1036H2V33***
SYSTEM	CAPACITY	BTU/H	12.000	12.000	18.000	24.000	36.000
		Range (BTU/H)	4,000~14,000	4,000 ~ 14,000	5,000 ~ 20,000	6,000 ~ 25,000	10,000~36,000
	EFFICIENCY	SEER	21,0	21,5	21,0	20,0	20,0
	ELECTRICAL	Volt / Hertz	115V / 60Hz	208~230V / 60Hz	208~230V / 60Hz	208~230V / 60Hz	208~230V / 60Hz
		Rated Current (A)	8,5	7	6,8	9,3	12,4
		Max Current (A)	16,5	13,5	13,5	13,5	21,0
	OPER. AMBIENT TEMP.	°F (°C)	5°F ~ 122°F (-15°C ~ 50°C)				
	APPLICATION AREA	(m²)	15 ~ 22	15 ~ 22	23 ~ 34	29 ~ 43	40 ~ 59
	MOISTURE REMOVAL	Liter/Hr	1,2	1,2	1,8	2,4	3,2
	REFRIGERANT	R410A (g)	660	630	900	1070	2750
	REFRIGERANT CONNECTIONS	Liquid (in)	1/4"	1/4"	1/4"	3/8"	3/8"
		Suction (in)	1/2"	1/2"	1/2"	5/8"	5/8"
		Maximum Length (m)	25	25	30	30	50
		Maximum Height (m)	10	10	20	20	25
INDOOR UNIT	AIR FLOW	m3/h	360~566	330~550	520~800	680~1000	646~1193
	SOUND LEVEL	dB(A)	33~40.5	26.5~40.5	31.5~46	36~47.5	39.5~49.5
	CONTROL	Type	REMOTE CONTROL OR WIFI				
		Auto Restart	YES				
		Protection	TIMER				
	DIMENSIONS	Unit W x H x D (mm)	802 x 295 x 200	802 x 295 x 200	971 x 321 x 228	1082x337x234	1259x362x283
OUTDOOR UNIT	INDOOR WEIGHT	Net (kg)	8,7	8	11,2	13,6	19,5
	COMPRESSOR	RLA	5,65	5,65	7,15	7,15	10
	OUTDOOR SOUND LEVEL	dB(A)	54	53,5	55,5	56,5	60
	DIMENSIONS	Unit W x H x D (mm)	720x495x270	720x495x270	765x555x303	805x330x554	946x810x410
	OUTDOOR WEIGHT	Net (kg)	23	21.2	27.9	30.5	64.3

*Specifications are subject to changes without notice. ** Model numbers, pictures, and specifications of all products are subject to change without further notice.

*** Heating specifications available upon request.



ACCESSORIES INCLUDED

- 3 Meter Copper
- Inter-connecting cable kit
- Installation Manual
- Plastic cover for valves
- LCD Wireless remote control



EASY INSTALLATION

PERFECT APPLICATION FOR



HOUSE



STORE



OFFICE

Distributed by :